

Yes - Auto-Seals only

▼ No – Manual

Luminous[™] – *Movable Glass Walls by Kwik-Wall* Technical Data

STELLA · LUNA · ILLONA · AVA · MATA

More Information

MATA[™] – Hinged-Paired Panels

SECTION 10 22 39 FOLDING PANEL PARTITIONS SECTION 10 22 39.13 FOLDING GLASS-PANEL PARTITIONS

Overview	Luminous MATA from Kwik-Wall - where the organic beauty of timber meets the visual clarity and performance of glass to provide the industry's most elegant, non-acoustic glass wall
Panel Type Individual Hinged-Paired Continuously-Hinged	design option. Triple-laminated frame options are available in Red Oak and Maple, stained and sealed in fou colors, or in Poplar, painted white or black. Top-supported, centerline-stacking hinged-paired panels make set-up and perimeter wall stacking quick and easy!
Partition Support ✓ Top Support Floor Support	
Stacking Configurations Centerline Offset Remote Bi-Parting	
Frame Thickness 4-11/16" [119] 50 STC 4-9/16" [116] 44 STC 2-13/16" [71] 1-3/4" [44] 1-3/8" [35] Frameless	
Operation – Panels Fully-Automatic Manual	
Operation – Seals Automatic Manual Fixed	
Sound Control 50 STC 44 STC	WEIGHTS: 7.0–7.5 lbs. / sq. ft.
☐ 43 STC ☐ 35 STC ☐ 33 STC ☑ Non-Acoustic	
Power Requirement Yes - Fully-Automatic	MATA



MATA[™] – Hinged-Paired Panels SECTION 10 22 39 – Folding Glass Partitions

PART 1 - GENERAL

1.01 DESCRIPTION

- A. General
 - Furnish and install operable glass partitions and suspension system. Provide all labor, materials, tools, equipment, and services for glass operable walls in accordance with provisions of contract documents.

1.02 RELATED WORK BY OTHERS

- A. Preparation of opening will be by General Contractor. Any deviation of site conditions contrary to approved shop drawings must be called to the attention of the architect.
- B. All header, blocking, support structures, jambs, and track enclosures, as required in 1.04 Quality Assurance.
- Pre-drilling of support structure in accordance with approved shop drawings.
- D. Paint or otherwise finishing all trim and other materials adjoining head and jamb of the partitions.

1.03 SUBMITTALS

A. Complete shop drawings are to be provided prior to fabrication indicating construction and installation details.

1.04 QUALITY ASSURANCE

- A. Preparation of the opening shall conform to the criteria set forth per ASTM E557 Standard Practice for Architectural Application and Installation of Operable Partitions.
- B. Glass shall be clear tempered or laminated with recent ASTM C1048 and ASTM C1036 standards.

1.05 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Proper storage of partitions before installation and continued protection during and after installation will be the responsibility of the General Contractor. IMPORTANT: Room in which panels are stored and/or installed must be temperature and moisture controlled.

1.06 WARRANTY

Track, carriers, and panel frames shall be guaranteed for one year against defects in material and workmanship. Glass breakage is not included in this warranty unless done during manufacturing or installation processes.

PART 2 - PRODUCTS

A. Upon compliance with all of the criteria specified in this section, Manufacturers wishing to bid products similar to the product specified must submit to the architect 10 days prior to bidding complete data in support of compliance. The submitting manufacturer guarantees the proposed substituted product complies with the product specified and as detailed on the drawings

2.02 MATERIALS

- A. Product to be top supported, hinged paired panel, wood-framed movable glass wall MATATM by Kwik-Wall®
 - Panels shall be nominally 1-3/4" [44mm] thick and 24" [610] to 48" [1219] in width. Maximum standard heights to 10'2" [3099]. Custom heights available but must be approved by the manufacturer.
 - Wood frame of triple laminated solid wood top and bottom rails and stiles that are constructed from custom veneers with an engineered wood core.
 - a. Basis of design is Red Oak, Maple or Poplar (select one).
 - b. Optional species:
 - i Cherry, Birch, Pine, Walnut and Douglas Fir are available
 - ii Customer selected species (requires factory approval for manufacturing compatibility)
 - Vertical lead rails shall contain full height partially recessed rubber bulb seal and factory provided hinges.
 - 4. Horizontal top & bottom rails shall incorporate continuous contact seals of brown multi-ply vinyl.
 - Each panel contains a mortise floor pin which extends into a floor mounted dust covered receptacle to stabilize and secure each panel in the opening.
 - 6. Glass inserts shall be a choice of
 - a. 1/4" [6] clear tempered glass (standard)
 - b. 5/16 [8] translucent laminated glass (factory approval required)
 - c. Custom glass (factory approval required)
 - 7. Glass shall be glazed using matching solid wood stops one side of panel.
 - 8. Panels will be hinged with adjustable mortise hinges or optional concealed hinges on the vertical edges on each pair of panels.
- B. Weight of the panels shall be approximately: 1/4" [6] tempered glass: 7.0 lbs. per sq. ft. 5/16" [8] laminated glass: 7.5 lbs. per sq. ft.
- C. Suspension system:
 - Manufacturer supplied -Track shall be of clear anodized architectural grade extruded aluminum alloy 6063-T6.
 Track design shall provide integral support for adjoining ceiling, soffit, or plenum sound barrier. Track shall be connected to the structural support by pairs of 3/8" [10] dia. threaded steel hanger rods.
 - Each panel shall be supported by one, 4-wheeled carrier. Wheels are made of precision ground steel ball bearings encased with molded polymer tires.



MATA[™] – Hinged-Paired Panels SECTION 10 22 39 – Folding Glass Partitions

2. Distributor supplied - Customized track and carrier systems supplied by distributor with panels customer fabricated to track and carrier specifications.

D. Finishes

- 1. Aluminum track shall be clear anodized
 - a. Optional upgrade:
 - i Custom anodized
 - ii Custom powder coated
- 2. Wood frame shall be furnished stained and finished with a matte polyurethane.
 - Select stain color from manufacturer's standard stain selection (Red Oak, Maple Frame species only):
 - (a) Fruitwood
 - (b) Dark Oak
 - (c) Wheat
 - (d) Cordovan
 - Premium stains available at an upcharge to be selected from the Sherwin Williams® Sher-Wood BAC wiping stains Color Selector.
 - c. Panels may be ordered unfinished for field finishing
 - d. Painted solid color: White or Black
 - e. Custom Color Painted (requires approval of color on veneer sample prior to final finishing and comes at an upcharge.)

[Specifiers Note: All painted systems are fabricated with Poplar frame species as the base.]

- 3. Hardware finish to be (select one)
 - a. Polished Brass (standard) (a/k/a Resista)
 - b. Antique Brass (standard)
 - c. Satin Nickel (standard)
 - d. Optional Upgrade (may extend lead times)
 - i Polished Chrome
 - ii Matte Black
 - iii Oil Rubbed Bronze (a/k/a Rustic Umber)
- E. Available Accessories/Options
 - Hinged closure panel of the same thickness and construction as the basic panels, one-way swing (select as required):
 - a. Hoppe Munchen style handle
 - i Optional upgrade: Lock to be keyed for Schlage brand
 - 2. Floor Locks
 - a. Adams Rite thumb turn floor lock
 - b. Adams Rite keyed floor lock
 - 3. Optional glass etching and decals available

2.03 OPERATION

- A. Panels shall be manually moved from the storage area, positioned in the opening, and either edge activated or face activated floorbolts set.
- B. Final partition closure to be by (select one):
 - 1. Hinged closure with handle
 - 2. Overlapping the opening
 - 3. 2" [51] trail gap
 - 4. Seal to face of storage pocket doors
- C. Stack/Store Panels
 - Retract floorbolt and move to storage area. Panels are stored at opening perimeter.

PART 3 - EXECUTION

- A. Installation. The complete installation of the glass wall system shall be by an authorized installer and be in strict accordance with the approved shop drawings and manufacturer's standard printed specifications, instructions, and recommendations.
- B. Cleaning
 - 1. All track and panel surfaces shall be wiped clean and free of handprints, grease, and soil per specific instructions.
 - 2. Optional specialty glass requires special cleaning per instructions provided.
 - 3. Cartoning and other installation debris shall be removed to on-site waste collection area, provided by others.

C. Training


- 1. Installer shall demonstrate proper operation and maintenance procedures to owner's representative.
- 2. Owners manuals shall be provided to owner's representative.



MATA[™] – Hinged-Paired Panels

SECTION 10 22 39 - Folding Glass Partitions

STACKING CONFIGURATIONS

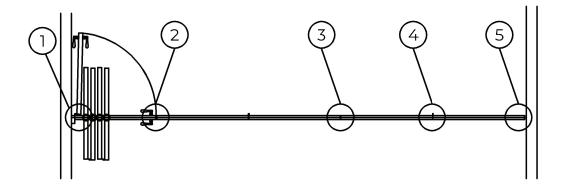

Stack Depth:

Type 425 Track: 3" [76] per panel + 7" [177] for Hinged Closure Handle

Pocket Width:

Widest Panel + 3" ea. side



MATA[™] – Hinged-Paired Panels

SECTION 10 22 39 - Folding Glass Partitions


HORIZONTAL DETAILS 1 2 Glazing-4 3 Lever handle handle Optional double door configuration detail




MATA[™] – Hinged-Paired Panels

SECTION 10 22 39 - Folding Glass Partitions

VERTICAL SECTIONS

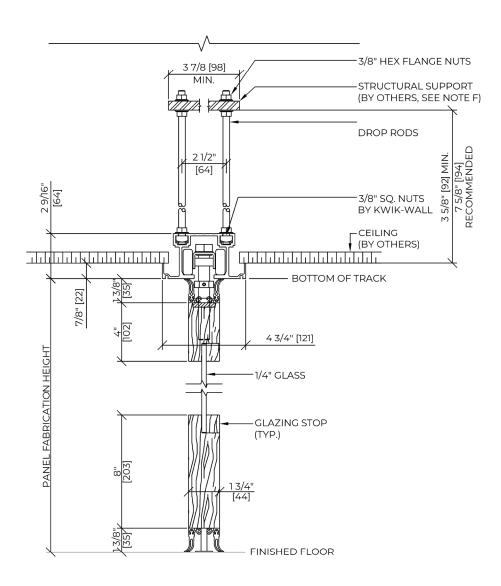

Face-Activated Floorbolt engages in floor receptacle to ensure panel to panel alignment & stability

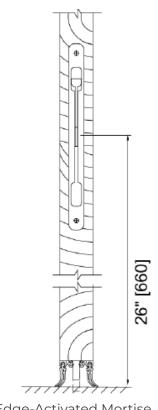

Edge-Activated Mortise Footbolt Pin




Footbolt receptacle-stainless steel dustproof strike/floor pin

MATA[™] – Hinged-Paired Panels

SECTION 10 22 39 - Folding Glass Partitions


ELEVATION DETAILS

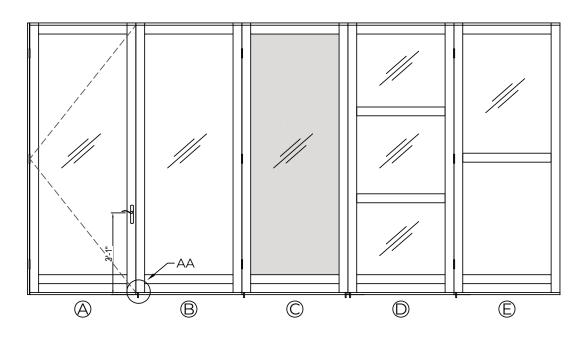

DETAIL AA



EDGE ACTIVATED
THROW BOLT WITH
STAINLESS STEEL
DUST-PROOF STRIKE
PLATE AND FLOOR PIN



OPTIONAL FACE ACTIVATED THROW BOLT AND FLOOR PIN



OPTIONAL DEADBOLT WITH KEY LOCK



OPTIONAL DEADBOLT WITH THUMB TURN

- A HINGE CLOSURE PANEL
- B BASIC PANEL
- FULL SATINY TRANSLUCENT (FROSTED) GLASS
- MUNTINS
- (E) PARTIAL (OR FULL HEIGHT) WOOD INSERTS