

Transforming Space Into POSSIBILITIES




TECHNICAL CAPABILITIES: Operable Walls



Kwik-Wall 3000, 2000 Series Operable Walls
Hufcor 600 Series Operable Walls



Finishes limited only by your imagination!

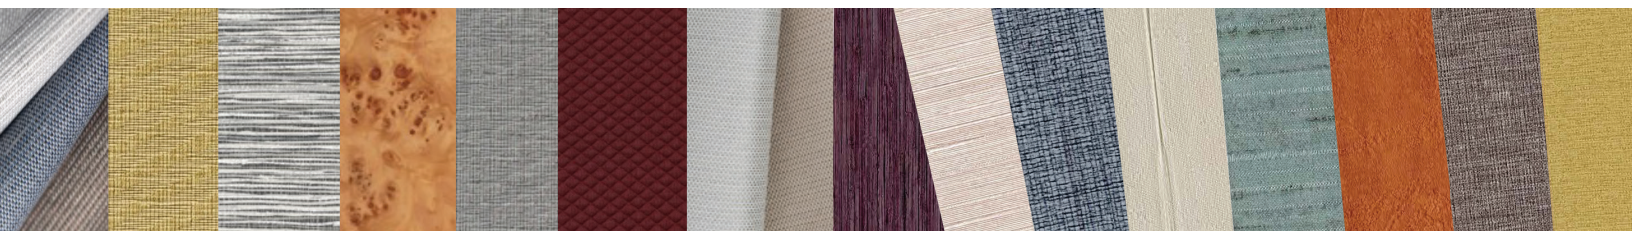

Operable Walls

Available in manually operated single, hinged-paired, or in continuously-hinged electric panel configurations; in certified STC sound control from 42 STC to an industry-leading 56 STC, 3000 Series (4" panel), or 2000 Series (3" panel), Kwik-Wall Operable Walls set the performance standard for ease of use, durability, aesthetics and best-in-class sound control.

Kwik-Wall is now the North American licensee for Hufcor® Operable Walls. Installed in some of the most iconic convention centers and hospitality facilities, and recognized world-wide for unparalleled quality, performance and design flexibility, Hufcor 600 Series operable walls have earned their legacy reputation.



- **KWIK-WALL 3000, 2000 SERIES**
- **HUFCOR 600 SERIES**

3000 SERIES OPERABLE WALLS – The industry's premium performance steel panel operable wall, engineered at 4" panel thickness and manufactured for rugged durability to fit openings up to 30'-0" tall, Series 3000 steel panels are certified by independent acoustical laboratory testing to achieve the industry's best-in-class acoustic performance up to 56 STC.



2000 SERIES OPERABLE WALLS – Engineered at 3" panel thickness to minimize panel storage footprint, Series 2000 operable walls are Kwik-Wall's most cost-effective operable wall choice. Available in all panel configurations, with certified STC ratings from 42 to 52 STC. You can depend on 2000 Series Operable Walls for acoustical performance and durability.



HUFCOR SERIES 600 OPERABLE WALLS – Boasting a long history of exceptional operational and acoustic performance in large and complex layouts around the world. Hufcor 600 Series by Kwik-Wall, with heights up to 60'-0" tall, are available through Kwik-Wall distribution partners throughout North America.






Operable Walls by Kwik-Wall Technical Data

3000 SERIES • 2000 SERIES • HUF COR 600 SERIES

MODEL 3010 — Individual Panels, Curve and Diverter

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☒ Individual Panels Curve & Diverter
☐ Individual Panels – Multi Directional
☐ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☐ Centerline
☒ Offset
☒ Remote
☐ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 56S ☒ 43A
☒ 52S ☒ 46A
☒ 50S ☒ 48A
☒ 46S ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin
 * Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☒ Operable

Bottom Seals

- ☐ Fixed ☒ Automatic
☒ Adjustable Fixed ☒ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); invisible hinges; dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 3010 – Individual panels with pre-programmed-travel paths utilizing our ultra-smooth radius curve and diverter track system which eliminates operator set up errors. Ideally suited for complex layouts and stacking configurations in applications up to 30'-0" [9144] in height. STC options from 43-56, Series 3000 operable walls offer industry-leading sound control and virtually unlimited panel finishes.

Model **3010** construction features panels that are 4" [101.6] thick, with a frame manufactured of durable roll-formed steel, and for maximum strength and sound control steel skins are standard. Optional insulated glass units are available to add daylighting.



Radius Curve
& Diverter Track

3000 Series Panel Weights

STC	lbs/sq ft	kg/m2
56S	12.9 lbs/sq ft	[63 kg/m2]
52S	9.5 lbs/sq ft	[46 kg/m2]
50S	9.5 lbs/sq ft	[46 kg/m2]
46S	8.5 lbs/sq ft	[41 kg/m2]
43A	5.9 lbs/sq ft	[29 kg/m2]
46A	6.6 lbs/sq ft	[32 kg/m2]
48A	7.5 lbs/sq ft	[37 kg/m2]
50A	9.0 lbs/sq ft	[44 kg/m2]



More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES • 2000 SERIES • HUF COR 600 SERIES

MODEL 3020 — Individual Multi-Directional Panels

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels Curve & Diverter
☒ Individual Panels – Multi Directional
☐ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☐ Centerline
☒ Offset
☒ Remote
☐ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 56S ☒ 43A
☒ 52S ☒ 46A
☒ 50S ☒ 48A
☒ 46S ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin

* Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☒ Operable

Bottom Seals


- ☒ Fixed ☒ Automatic
☒ Adjustable Fixed ☒ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); invisible hinges; dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 3020 – featuring individual, multi-directional panels capable of making 90° turns at X, L, or T track intersections, allowing multiple layout and panel storage options. With STC options from 43-56, 3000 Series Operable Walls offer industry-leading premium sound control.

Model **3020** construction features panels that are 4" [101.6] thick, manufactured of a durable roll-formed steel frame, and standard steel skins for maximum durability and sound control. Optional acoustical glass inserts are available to add daylighting.



90° X, L, T intersections

3000 Series Panel Weights

STC	lbs/sq ft	kg/m2
56S	12.9 lbs/sq ft	[63 kg/m2]
52S	9.5 lbs/sq ft	[46 kg/m2]
50S	9.5 lbs/sq ft	[46 kg/m2]
46S	8.5 lbs/sq ft	[41 kg/m2]
43A	5.9 lbs/sq ft	[29 kg/m2]
46A	6.6 lbs/sq ft	[32 kg/m2]
48A	7.5 lbs/sq ft	[37 kg/m2]
50A	9.0 lbs/sq ft	[44 kg/m2]



More Information



Operable Walls by Kwik-Wall

Technical Data

3000 SERIES • 2000 SERIES • HUF COR 600 SERIES

MODEL 3030 — Hinged-Paired Panels

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels Curve & Diverter
☐ Individual Panels – Multi Directional
☒ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☒ Centerline
☐ Offset
☐ Remote
☒ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 56S ☒ 43A
☒ 52S ☒ 46A
☒ 50S ☒ 48A
☒ 46S ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin

* Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☒ Operable

Bottom Seals

- ☐ Fixed ☒ Automatic
☒ Adjustable Fixed ☒ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); invisible hinges; dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 3030 – featuring panels hinged together in groups of two (2), allowing quick and easy set up. With centerline support and operation, hinged-paired panels are ideally suited for straight-run room division applications up to 24'-2" [4928] in height. With STC options from 43-56, 3000 Series Operable Walls offer industry-leading premium sound control.

Model **3030** construction features panels that are 4" [101.6] thick, manufactured of a durable roll-formed steel frame, and standard steel skins for maximum durability and sound control. Optional acoustic glass inserts are available to add daylighting.



3000 Series Panel Weights

STC	lbs/sq ft	kg/m2
56S	12.9 lbs/sq ft	[63 kg/m2]
52S	9.5 lbs/sq ft	[46 kg/m2]
50S	9.5 lbs/sq ft	[46 kg/m2]
46S	8.5 lbs/sq ft	[41 kg/m2]
43A	5.9 lbs/sq ft	[29 kg/m2]
46A	6.6 lbs/sq ft	[32 kg/m2]
48A	7.5 lbs/sq ft	[37 kg/m2]
50A	9.0 lbs/sq ft	[44 kg/m2]



More Information



Operable Walls by Kwik-Wall

Technical Data

3000 SERIES • 2000 SERIES • HUF COR 600 SERIES

MODEL 3050 — Continuously-Hinged Electric Panels

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels Curve & Diverter
☐ Individual Panels – Multi Directional
☐ Hinged-Paired
☒ Continuously-Hinged

Partition Operation

- ☐ Manual
☒ Electric

Stacking Configurations

- ☒ Centerline
☐ Offset
☐ Remote
☒ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 56S ☒ 43A
☒ 52S ☒ 46A
☒ 50S ☒ 48A
☒ 46S ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin

* Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☐ Operable

Bottom Seals

- ☐ Fixed ☐ Automatic
☒ Adjustable Fixed ☐ Extended
☐ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, concealed door closures & exit signs); invisible hinges; dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 3050 – features electric operation for automatic set up. With centerline support, continuously-hinged electric operable walls are ideally suited for large, tall openings for straight-run room division applications up to 24'-2" [7366] with steel skins, and 14'-2" with acoustic substrate [4318]. With STC options from 43-56, 3000 Series Operable Walls offer industry-leading premium sound control.

Model 3050 construction features panels that are 4" [101.6] thick, manufactured of a durable roll-formed steel frame, and standard steel skins for maximum durability and sound control. Optional acoustic glass inserts are available to add daylighting.



3000 Series Panel Weights

STC	lbs/sq ft	kg/m2
56S	12.9 lbs/sq ft	[63 kg/m2]
52S	9.5 lbs/sq ft	[46 kg/m2]
50S	9.5 lbs/sq ft	[46 kg/m2]
46S	8.5 lbs/sq ft	[41 kg/m2]
43A	5.9 lbs/sq ft	[29 kg/m2]
46A	6.6 lbs/sq ft	[32 kg/m2]
48A	7.5 lbs/sq ft	[37 kg/m2]
50A	9.0 lbs/sq ft	[44 kg/m2]



More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES • 2000 SERIES • HUF COR 600 SERIES

3000 SERIES — Pocket Doors

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Pocket Door Types

- ☒ Bi-Fold Doors w/ Bulb Seal
- ☒ Single Door w/ Bulb Seal
- ☒ Single Door w/ Expander
- ☒ Double Doors w/ Lap Trim
- ☒ Double Doors w/ Expander
- ☒ Double Doors w/ Expander & Interlock Switches (3050 models)

Operation

- ☒ Manual
- ☒ Electric: Safety Interlock disables electric operable wall operation when pocket doors are closed.

STC Options

A=Acoustic Substrate S=Steel Skin

- | | |
|---|---|
| ☒ 56S | ☒ 43A |
| ☒ 52S | ☒ 46A |
| ☒ 50S | ☒ 48A |
| ☒ 46S | ☒ 50A |

Panel Finishes

- | | |
|--|--|
| ☒ Vinyl | ☒ High Pressure Laminate |
| ☒ Fabric | ☒ Wood Veneer |
| ☒ Carpet | ☒ Customer Supplied* |
| ☒ Digitally Printed Steel Skin | |
- * Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
- ☒ Capped Trim

Top Seals

- ☒ Fixed: seals against pocket door header trim
- ☐ Operable

Bottom Seals

- | | |
|---|------------------------------------|
| ☒ Fixed | ☐ Automatic |
| ☐ Adjustable Fixed | ☐ Extended |
| ☐ Operable | |

Security Hardware Options

- ☒ Keyed Cylinder Lock with adjustable concealed vertical rod interfacing with strike plate attached to finished floor.
- ☒ Master Keyed Cylinder Lock (optional), furnished by others and installed by Kwik-Wall as noted on submittal shop drawings.

KWIK-WALL's **3000 Series Pocket Doors** close off your operable wall storage area when panels are not in use. Constructed with the same materials as our **3000 Series** operable wall panels, 3000 Series pocket doors can also serve as the perimeter wall for your final closure to seal against. In very wide openings, sealing to the face of the pocket door can eliminate panels without compromising the acoustic integrity of your operable wall.

Series 3000 Pocket Doors are 4" [101.6] thick, manufactured of a durable roll-formed steel frame, and standard steel skins for maximum durability and sound control.



3000 Series Panel Weights

STC	lbs/sq ft	kg/m2
56S	12.9 lbs/sq ft	[63 kg/m2]
52S	9.5 lbs/sq ft	[46 kg/m2]
50S	9.5 lbs/sq ft	[46 kg/m2]
46S	8.5 lbs/sq ft	[41 kg/m2]
43A	5.9 lbs/sq ft	[29 kg/m2]
46A	6.6 lbs/sq ft	[32 kg/m2]
48A	7.5 lbs/sq ft	[37 kg/m2]
50A	9.0 lbs/sq ft	[44 kg/m2]



More Information




Operable Walls by Kwik-Wall Technical Data

3000 SERIES • **2000 SERIES** • HUF COR 600 SERIES

MODEL 2010 — Individual Panels, Curve and Diverter

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☒ Individual Panels, Curve and Diverter
☐ Individual Panels, Multi-Directional
☐ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☐ Centerline
☒ Offset
☒ Remote
☐ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 52S ☒ 45A
☒ 50S ☒ 49A
☒ 42A ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin
 *Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☐ Operable

Bottom Seals

- ☐ Fixed ☒ Automatic
☒ Adjustable Fixed ☐ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 2010 – featuring individual panels with pre-programmed-travel paths utilizing our ultra-smooth radius curve and diverter track system, eliminates operator set up errors. Ideally suited for complex layouts and stacking configurations in applications up to 16'-2" [4928] in height. With STC options from 42-52, 2000 Series Operable Walls offer industry-leading premium sound control.

Model **2010** construction features panels that are 3" [76.2] thick, manufactured of a durable roll-formed steel frame, with steel skins for maximum durability or with acoustic substrate construction, in STC ratings from 42-50 are available. Optional acoustical glass insert vision lites can be added.



Radius Curve
& Diverter Track

2000 Series Panel Weights

STC	lbs./sq.ft.	Kg/m2
52S	9.2 lbs./sq. ft.	[44.9 kg/m2]
50S	8.6 lbs./sq. ft.	[41.9 kg/m2]
42A	6.5 lbs./sq. ft.	[36.6 kg/m2]
45A	7.5 lbs./sq. ft.	[36.6 kg/m2]
49A	9.0 lbs./sq. ft.	[43.9 kg/m2]
50A	9.0 lbs./sq. ft.	[43.9 kg/m2]



More Information



Operable Walls by Kwik-Wall

Technical Data

3000 SERIES • **2000 SERIES** • HUF COR 600 SERIES

MODEL 2020 — INDIVIDUAL, MULTI-DIRECTIONAL PANELS

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels, Curve and Diverter
☒ Individual Panels, Multi-Directional
☐ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☐ Centerline
☒ Offset
☒ Remote
☐ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 52S ☒ 45A
☒ 50S ☒ 49A
☒ 42A ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skins
 * Material subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☐ Operable

Bottom Seals

- ☐ Fixed ☒ Automatic
☒ Adjustable Fixed ☐ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 2020 – featuring individual, multi-directional panels capable of making 90° turns at X, L, or T track intersections in room division applications up to 16'-2" [9144] in tall. With STC options from 42-52, 2000 Series Operable Walls offer industry-leading premium sound control.

Model **2020** construction features panels that are 3" [76.2] thick, manufactured of a durable roll-formed steel frame, with steel skins for maximum durability or with acoustic substrate construction in STC ratings from 42-50 are available. Optional acoustical glass insert vision lites can be added.



2000 Series Panel Weights

STC	lbs./sq.ft.	Kg/m2
52S	9.2 lbs./sq. ft.	[44.9 kg/m2]
50S	8.6 lbs./sq. ft.	[41.9 kg/m2]
42A	6.5 lbs./sq. ft.	[36.6 kg/m2]
45A	7.5 lbs./sq. ft.	[36.6 kg/m2]
49A	9.0 lbs./sq. ft.	[43.9 kg/m2]
50A	9.0 lbs./sq. ft.	[43.9 kg/m2]



More Information



Operable Walls by Kwik-Wall

Technical Data

3000 SERIES • **2000 SERIES** • HUF COR 600 SERIES

MODEL 2030 — Hinged-Paired Panels

SECTION 10 22 26 OPERABLE PARTITIONS

SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels, Curve and Diverter
☐ Individual Panels, Multi-Directional
☒ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☒ Centerline
☐ Offset
☐ Remote
☒ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 52S ☒ 45A
☒ 50S ☒ 49A
☒ 42A ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin
 *Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☐ Operable

Bottom Seals

- ☐ Fixed ☒ Automatic
☒ Adjustable Fixed ☐ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 2030 – featuring panels hinged together in groups of two (2), allowing quick and easy set up. With centerline support and operation, hinged-paired panels are ideally suited for straight-run room division applications up to 16'-2" [4.93] in height. With STC options from 42-52, 2000 Series Operable Walls offer industry-leading premium sound control.

Model **2030** construction features panels that are 3" [76.2] thick, manufactured of a durable roll-formed steel frame, and standard steel skins for maximum durability and sound control. For acoustic substrate construction, or for finishes that require acoustic substrate (HPL, Wood Veneer), STC ratings from 42-50 are available. Optional acoustical glass insert vision-lites can be added.



2000 Series Panel Weights

STC	lbs./sq.ft.	Kg/m2
52S	9.2 lbs./sq. ft.	[44.9 kg/m2]
50S	8.6 lbs./sq. ft.	[41.9 kg/m2]
42A	6.5 lbs./sq. ft.	[36.6 kg/m2]
45A	7.5 lbs./sq. ft.	[36.6 kg/m2]
49A	9.0 lbs./sq. ft.	[43.9 kg/m2]
50A	9.0 lbs./sq. ft.	[43.9 kg/m2]



More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES • **2000 SERIES** • HUF COR 600 SERIES

MODEL 2050 — Continuously-Hinged Electric Panels

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels, Curve and Diverter
☐ Individual Panels, Multi-Directional
☐ Hinged-Paired
☒ Continuously-Hinged

Partition Operation

- ☐ Manual
☒ Electric

Stacking Configurations

- ☒ Centerline
☐ Offset
☐ Remote
☒ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 52S ☒ 45A
☒ 50S ☒ 49A
☒ 42A ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*
☒ Digitally Printed Steel Skin

* Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☐ Operable

Bottom Seals

- ☐ Fixed ☐ Automatic
☒ Adjustable Fixed ☐ Extended
☐ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

KWIK-WALL's Model 2050 – features electric operation for fully automatic setup. With centerline support, continuously-hinged electric operable walls are ideally suited for large, tall openings for straight-run room division applications up to 14'-2" [4318]. With STC options from 42-52, Series 2000 operable walls offer industry-leading premium sound control.

Model 2050 construction features panels that are 3" thick [76.2] thick, manufactured of a durable roll-formed steel frame with steel skins, or with acoustic substrate to form a rigid, unitized and structural panel for maximum sound control and durability. Optional insulated glass units can be added.



2000 Series Panel Weights

STC	lbs./sq.ft.	Kg/m2
52S	9.2 lbs./sq. ft.	[44.9 kg/m2]
50S	8.6 lbs./sq. ft.	[41.9 kg/m2]
42A	6.5 lbs./sq. ft.	[36.6 kg/m2]
45A	7.5 lbs./sq. ft.	[36.6 kg/m2]
49A	9.0 lbs./sq. ft.	[43.9 kg/m2]
50A	9.0 lbs./sq. ft.	[43.9 kg/m2]



More Information



Operable Walls by Kwik-Wall

Technical Data

3000 SERIES • **2000 SERIES** • HUF COR 600 SERIES

2000 SERIES — Pocket Doors

SECTION 10 22 26 OPERABLE PARTITIONS

SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Pocket Door Types

- ☒ Bi-Fold Doors w/ Bulb Seal
- ☒ Single Door w/ Bulb Seal
- ☒ Single Door w/ Expander
- ☒ Double Doors w/ Lap Trim
- ☒ Double Doors w/ Expander
- ☒ Double Doors w/ Expander & Interlock Switches [2050 model]

Operation

- ☒ Manual
- ☒ Electric: Safety Interlock disables 2050 electric operable wall operation when pocket doors are closed.

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 52S ☒ 45A
- ☒ 50S ☒ 49A
- ☒ 42A ☒ 50A

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
 - ☒ Fabric ☒ Wood Veneer
 - ☒ Carpet ☒ Customer Supplied*
 - ☒ Digitally Printed Steel Skin
- * Material Subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
- ☒ Capped Trim

Top Seals

- ☒ Fixed
- ☐ Operable

Bottom Seals

- ☒ Fixed ☐ Automatic
- ☐ Adjustable Fixed ☐ Extended
- ☐ Operable

Security Hardware Options

- ☒ Keyed Cylinder Lock with adjustable concealed vertical rod interfacing with strike plate attached to finished floor.
- ☒ Master Keyed Cylinder Lock (optional), furnished by others and installed by Kwik-Wall as noted on submittal shop drawings.

KWIK-WALL's **2000 Series Pocket Doors** close off your operable wall storage area when panels are not in use. Constructed with the same materials as our 2000 Series operable wall panels, **2000 Series** pocket doors hide the operable wall panels and can serve as the perimeter wall for your final closure to seal against. In very wide openings, sealing to the face of the pocket door can eliminate panels without compromising the acoustic integrity of your operable wall.

Series **2000** Pocket Doors are 3" [76.2] thick, manufactured of a durable roll-formed steel frame, with steel skins for maximum durability and sound control.



2000 Series Panel Weights

STC	lbs./sq.ft.	Kg/m2
52S	9.2 lbs./sq. ft.	[44.9 kg/m2]
50S	8.6 lbs./sq. ft.	[41.9 kg/m2]
42A	6.5 lbs./sq. ft.	[36.6 kg/m2]
45A	7.5 lbs./sq. ft.	[36.6 kg/m2]
49A	9.0 lbs./sq. ft.	[43.9 kg/m2]
50A	9.0 lbs./sq. ft.	[43.9 kg/m2]



More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES • 2000 SERIES • **HUFCOR 600 SERIES**

MODEL 641 — Individual Panels

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☒ Individual Panels Curve & Diverter
- ☒ Individual Panels – Multi Directional
- ☐ Hinged-Paired
- ☐ Continuously-Hinged

Partition Operation

- ☒ Manual
- ☐ Electric

Stacking Configurations

- ☐ Centerline
- ☒ Offset
- ☒ Remote
- ☐ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 54A
- ☒ 56S

Panel Finishes

- ☒ Vinyl
- ☒ High Pressure Laminate
- ☒ Fabric
- ☒ Wood Veneer
- ☒ Carpet
- ☒ Customer Supplied*

* Material subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
- ☒ Capped Trim

Top Seals

- ☒ Fixed
- ☒ Operable

Bottom Seals

- ☒ Fixed
- ☒ Automatic
- ☒ Adjustable Fixed
- ☒ Extended
- ☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

Hufcor 600 Series operable walls have earned their legacy reputation. Recognized worldwide unparalleled quality, design flexibility, acoustic performance and lasting durability, providing exceptional sound control and operational performance in thousands of large, complex installations around the world.

Hufcor 641 (by Kwik-Wall) individual, Multi-directional panel configuration, features panels that are 4" [101.6] thick, manufactured of a durable 16 ga. roll-formed steel frame, standard steel skins for maximum durability and sound control. Single panel heights are available to 41'-7" feet [9144 to 12675] – up to 60 feet [18288] with spliced panel construction.



Hufcor 641 Panel Weights

STC	lbs./sq.ft.	Kg/m2
54S	10.9 lbs./sq.ft.	[53.2 kg/m2]
56S	13.6 lbs./sq.ft.	[63kg/m2]



HUFCOR 641
More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES • 2000 SERIES • **HUFCOR 600 SERIES**

MODEL 642 — HINGED-PAIRED PANELS

SECTION 10 22 26 OPERABLE PARTITIONS
SECTION 10 22 39 FOLDING PANEL PARTITIONS



Overview

Panel Type

- ☐ Individual Panels Curve & Diverter
☐ Individual Panels – Multi Directional
☒ Hinged-Paired
☐ Continuously-Hinged

Partition Operation

- ☒ Manual
☐ Electric

Stacking Configurations

- ☒ Centerline
☐ Offset
☐ Remote
☒ Bi-Parting

STC Options

A=Acoustic Substrate S=Steel Skin

- ☒ 54S
☒ 56S

Panel Finishes

- ☒ Vinyl ☒ High Pressure Laminate
☒ Fabric ☒ Wood Veneer
☒ Carpet ☒ Customer Supplied*

* Material subject to Kwik-Wall approval

Vertical Panel Joints

- ☒ Trimless
☒ Capped Trim

Top Seals

- ☒ Fixed
☒ Operable

Bottom Seals

- ☒ Fixed ☒ Automatic
☒ Adjustable Fixed ☒ Extended
☒ Operable

Available Options

Storage pocket doors; ADA Pass Doors – (single, double with panic hardware, concealed door closures & exit signs); dry marker surfaces; insulated glass unit inserts; tack surfaces.

With a long history of exceptional operational and acoustical performance in large and complex layout around the world, **Hufcor 600 Series** operable walls have earned their legacy reputation.

Hufcor 642 paired panel configuration by Kwik-Wall, features panels that are 4" [101.6] thick, at up 24'3" [7391] height, manufactured of a durable 16 ga. roll-formed steel frame, and standard steel skins for maximum durability and sound control. Panels are hinged in pairs allowing fast setup. They may be stacked at either or both ends of the track or in a storage pocket at room perimeters.



Hufcor 642 Panel Weights

STC	lbs./sq.ft.	Kg/m2
54S	10.9 lbs./sq.ft.	[53.2 kg/m2]
56S	13.6 lbs./sq.ft.	[63kg/m2]



HUFCOR 642
More Information



Operable Walls by Kwik-Wall Technical Data

3000 SERIES · 2000 SERIES · HUF COR 600 SERIES

TRACK — OPERABLE WALL

Each and every **Kwik-Wall Operable Wall** track system is engineered and rigorously tested for the actual size and weight/sq. ft. of your partition, based on the specified panel construction and STC rating. Aluminum extruded tracks have continuous attachment raceways for connecting to partition support structure; crisp, clean lines with built-in ceiling return flange to protect surrounding finishes; and alignment pin slots for optimum track performance across track joints. For tall, heavier panels, our performance steel track systems give you confidence that your operable partitions will give years of trouble-free operation.


Aluminum Track Systems

Aluminum Track Systems

Direct attach hanger rods to square nut raceway, **or** alternate attach with hanger brackets


Configuration Application

HP = Hinged Paired Panels
CD = Individual Panels Curve & Diverter
MD = Individual Panels Multi-Directional
CH = Continuously-Hinged Electric Panels




Type 425

MD




Type 850

MD



Type 850

HP / CD



Type 425

HP / CD


Steel Track & Aluminum with Steel Tread Track Systems

Direct attach hanger rods to square nut raceway, **or** alternate attach with hanger brackets

(typ. Except Type 11L Track)

Configuration Application


HP = Hinged Paired Panels
CD = Individual Panels Curve & Diverter
MD = Individual Panels Multi-Directional
CH = Continuously-Hinged Electric Panels



Type 11L

Steel Track w/
Aluminum Ceiling Trim


HP



Type 850 HD

Alum. Track w/ Steel
Tread Inserts and Steel-Tired Carriers

HP / CD / CH



Type 425 SR

Alum. Track w/ Steel
Tread Inserts and Steel-Tired Carriers

HP / CD

WARRANTY: Our confidence in the engineered load-bearing capacity, durability, operational ease and aesthetics that are built into all of our track systems, allows us to offer the best track & carrier warranty in the industry: **10 years on every manually operated track and carrier system we manufacture!**



More Information

- KWIK-WALL 3000, 2000 SERIES
- HUF COR 600 SERIES

GALLERY

